

FD1700S



Dedicated Chip



Modular




Back Battery Unit



Layer3 Switching

Brief Views

The GPON OLT FD1700S fully complies with the relevant standards of ITU G.984.x and FSAN. It's a 1RU device featuring an uplink SFP port with options for either 4*1G/10G and 4*10G/25G. The PON ports come in configurations of 4/8/16 ports. Each GPON port supports a splitting ratio of 1:128. Consequently, the GPON system can accommodate up to 4096 terminal connections, depending on the number of PON ports chosen.

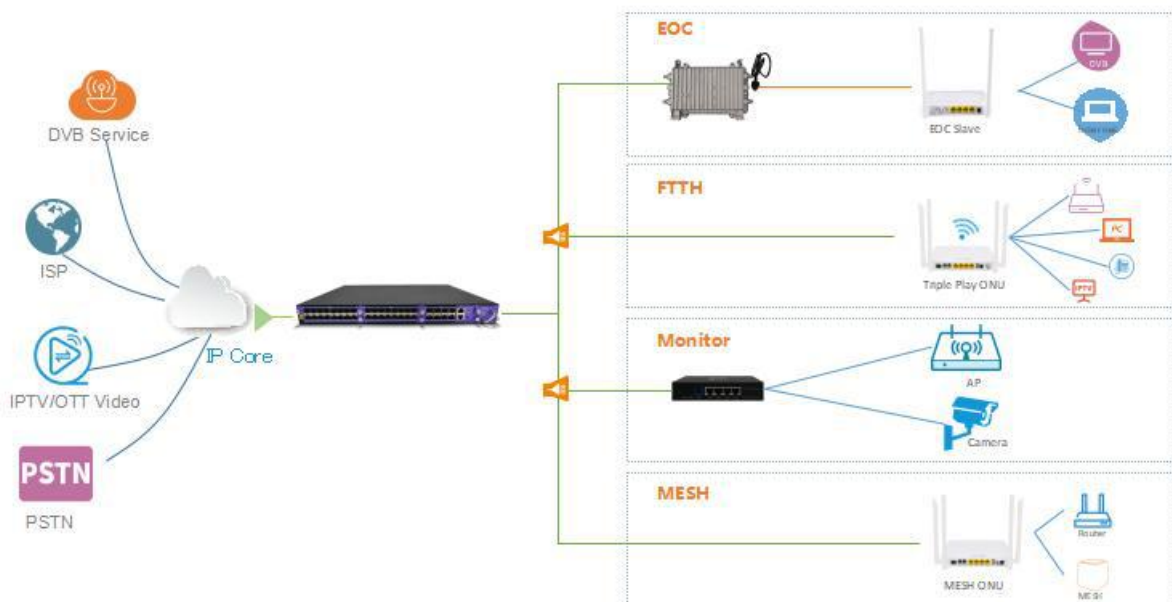

Functional Feature

GPON Function

- ITU-T G.984/G.988 standard
- Support OMCI protocol
- T-CONT DBA
- GEMPORT traffic
- ONU auto discover
- Ranging function
- Downstream data encrypted

Layer 2 Switching Function

- Access/Trunk/Hybrid L2 access mode
- Support 64K MAC address
- Support 4094 VLANs
- VLAN filter function,VLAN transform
- Smart QinQ
- L2 port mirror
- Support 1024 static MAC address
- MAC address learning/aging
- MAC address limitation
- Static/Dynamic LACP
- ACL
- RSTP

Layer 3 Switching Function

- Static routing
- DHCP server/DHCP relay/DHCP snooping
- ARP proxy

Multicast Function

- IGMP snooping
- IGMP V1/V2/V3
- Multicast VLAN translation
- Multicast QOS
- IGMP protocol statistics

QOS Guarantee

- Traffic control function
- Congestion avoidance function
- Queue scheduling function
- COS Priority function
- ACL function

Reliability Function

- 1+1 power modules
- BBU optional
- Fan speed automatically adjusts based on temperature
- Enables manual adjustment for primary and secondary power sources


Management Function

- CLI/WEB/Telnet/SSH
- Performance Management
- Alarm Management
- Security Management

Maintenance Function

- Device log
- Device upgrade
- Fault diagnose function
- Condition monitoring function

Product Interface

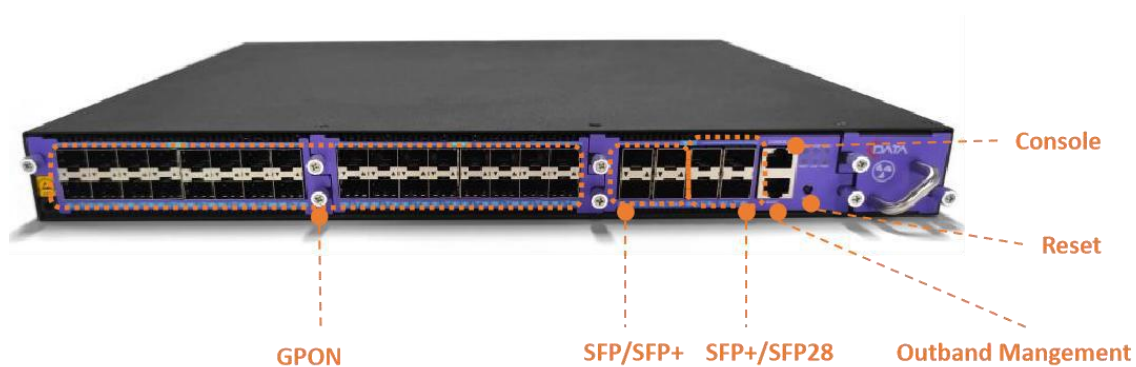

Product Specification

Mechanics

Management Rack	1U 19-inch standard box
Dimensions	440*375*44mm
Weight	About 6kg

Hardware

Uplink Port	4*1G(SFP)/10G SFP+ 4*10G(SFP+)/25G(SFP28)		
PON Port	Quantity	Two boards, each board has three specifications are available (4/8/16 GPON)	
	Physical interface	SFP slot	
	Interface type	GPON: ITU-TG.984.2 Class B+/Class C+	
	Max splitting ratio	GPON: 1:128	
Management Port	1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port		
PON Port attribute	Transmission distance	20KM	
	Port rate	GPON: Downstream: 2.5Gbps	Upstream: 1.25Gbps
	Wavelength	Forwarding: 1490nm	Receiving: 1310nm
	Interface type	SC/UPC	
	Fiber type	9/125 μ m SMF (Single Mode Fiber)	
	Light transmission power	Class B+: +1.5 ~ +5dBm	Class C+: +3 ~ +7dBm
	Receiving sensitivity	Class B+: -28dBm	Class C+: -30dBm
	Saturation power	Class B+: -8dBm	Class C+: -12dBm
Backplane Bandwidth	400G		

Power supply

AC	-40 ~ - 57 V
DC	90V ~ 240V

Environment

Working temperature	-15 ~ 50 $^{\circ}$ C
Storage temperature	-40 ~ 85 $^{\circ}$ C
Ambient humidity	5 ~ 90% (Non-condensing)

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.